

EATON

Powerware

Powerware® 5110 Uninterruptible Power System

500 - 1000 VA

For office computer

As much as business depends on electric power, public utility power is anything but dependable. That is shocking news in an age when sensitive computer systems

if a computer crashes due to power problems and hours of work may be lost. The Powerware 5110 does not only offer backup when power is totally lost, it also regulates the voltage and

have the shutdown software installed which takes over automatically saving your work and shutting down your applications without you doing anything. Once power resumes you can start exactly where you left off, without losing any data".

occupies a small footprint and can if desired be placed on its side to fit under a monitor. The 5110 is equipped with a USB port and if you choose to install the bundled shutdown software it automatically saves your files in the event of extended power outages (compatible with Windows 95/98, 2000, ME).



form the core of virtually all business functions. Advances in processing capacity and miniaturization make these systems more susceptible than ever to power fluctuations—and make system crashes and data losses more costly than ever. In business office environments, the awareness towards power protection needs has increased, leading to the protection of server farms and individual servers. However individual computers are still often left unprotected. This means that individual work will still be lost

thereby offers protection against five of the nine most common power problems faced in an office environment.

"With Powerware 5110 you can continue to write, make your presentations, update your accounts, surf the net or whatever else you do, even while others are re-booting their computers due to disturbance in utility power. And in the event of a total blackout, the unit runs on battery so that you have time to save your work. Or you can

Three power ratings

The Powerware 5110 comes in three power ratings 500 VA, 700 VA and 1000 VA covering the needs for effective single computer protection. All models have four battery backup protected outlets as well as four "surge-protection" only outlets (for printers, faxes and other peripheral equipment) not needing battery backup. The Powerware 5110

All you need included in the box

All models come bundled with the shutdown software, USB cable and two IEC-IEC load cables as well as a RJ-11 cable to protect your Tele/DSL line from surges.



Technical Specifications

Rating	Powerware 5110 500 VA	Powerware 5110 700 VA	Powerware 5110 1000 VA
Part number	103004261-5591	103004262-5591	103004263-5591
Capacity (VA/Watts)	500/300	700/420	1000/600
Dimensions W*D*H (mm)	87*260*270 mm	87*260*270 mm	87*384*270 mm
Weight (kg)	6 kg	8 kg	12 kg
Input connection	IEC320/10A	IEC320/10A	IEC320/10A
Output connection	4*IEC320 10A + 4 IEC320 10A surge only	4*IEC320 10A + 4 IEC320 10A surge only	4*IEC320 10A + 4 IEC320 10A surge only
Typical runtime	3 min full load 8 min half load	3 min full load 8 min half load	3 min full load 8 min half load
Bundled with	(2) IEC-IEC cables Software & USB cable RJ 11 cable	(2) IEC-IEC cables Software & USB cable RJ 11 cable	(2) IEC-IEC cables Software & USB cable RJ 11 cable

Operational

Nominal Input voltage (VAC)	230 VAC
Input voltage range	178-275 VAC
Operating frequency	50/60 Hz auto sensing
Nominal Output voltage	230 VAC
Output voltage regulation	230 V +/- 10%
Overload capacity	130%+/- 10% immediate shutdown 105% shutdown after 5 min
Efficiency	95%, normal mode

User interface

LED	UPS On, UPS on Battery, Overload
Standard communication ports	USB

Environmental

RoHS Compliance	EU RoHS/WEEE Compliant
Operating temperature	0°C - + 40 °C
Altitude	< 3000 m
Audible noise at 1 meter	< 40 dB

Certification

Markings	CE
----------	----

Backup time table

Load	5110 500 VA	5110 700 VA	5110 1000 VA
50W	40 min	50 min	80 min
100W	17 min	20 min	60 min
150W	10 min	14 min	40 min
200W	6 min	9 min	25 min
250W	4 min	7,5 min	20 min
300W	3 min	6 min	17 min
350W		4 min	14 min
400W		3 min	12 min
450W			10 min
500W			8 min
550W			6 min
600W			5 min

Note! Runtimes are approximate and may vary with equipment, configuration, battery age temperature.

In the interest of continual product improvement all specifications are subject to change without notice.

Powerware®, Advanced Battery Management, LanSafe, PowerVision, and FORESEER are trademark(s) of Eaton Power Quality Corporation. © 2004 Eaton Corporation


Mailing Address:
Eaton Power Quality Pte Ltd
15 Changi Business Park Central 1
Level 3 Singapore 486057
Tel: +65 6825 1684
Fax: +65 6825 1689
EatonSEA@eaton.com
www.eaton.com/powerware

INDONESIA
Tel: +6221 522 6181
Fax: +6221 522 6182

MALAYSIA
Tel: +603 7804 3618
Fax: +603 7803 6193

THAILAND
Tel: +662 946 6843
Fax: +662 519 0574

VIETNAM
Tel: +844 936 5303
Fax: +844 936 5307

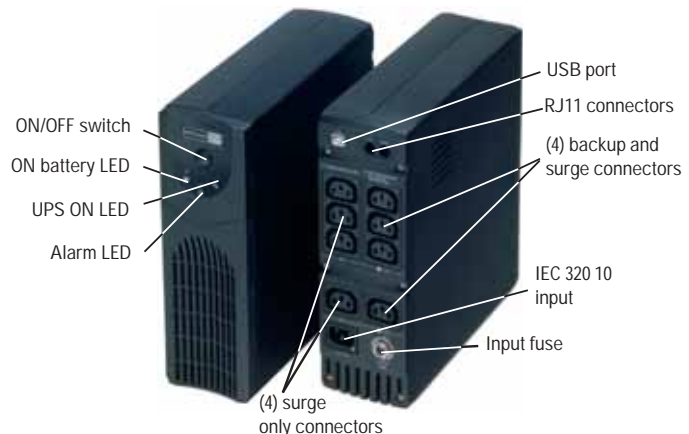

For more product information, please contact:

EATON

Powerware