Date PDF Generated:1/24/2011 Page:1 of 1

REV	ECO No.	REVISION	DR	CK	AP	AP	DATE
A		RELEASED	J.O.				27 APR 04
B	7919	COR. VOLTAGE RATINGS	LW		J.O.		10 JUNE 04
C	8265	CHANGE TO RoHS	J.O.				6 FEB 06
D	8696	CHG. TO EATON LOGOS	LS		DK		08 MAY 09

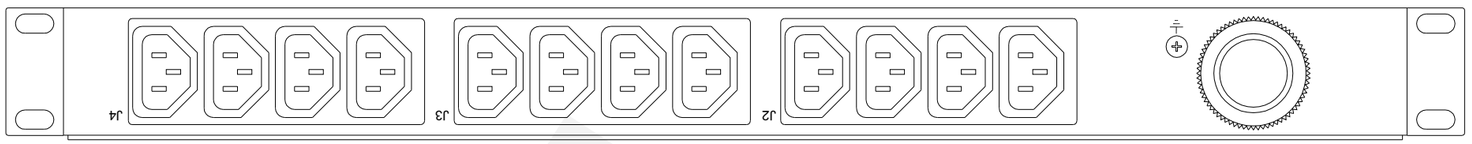

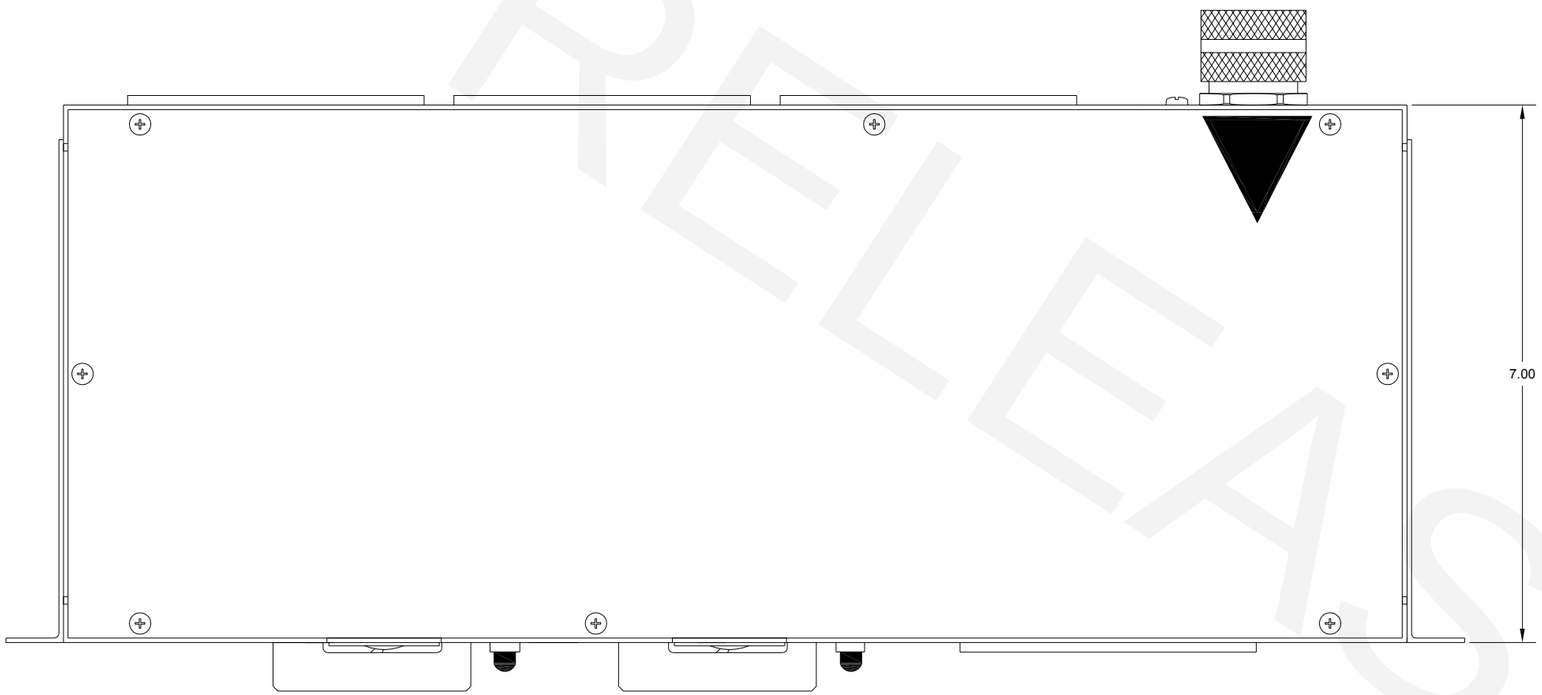

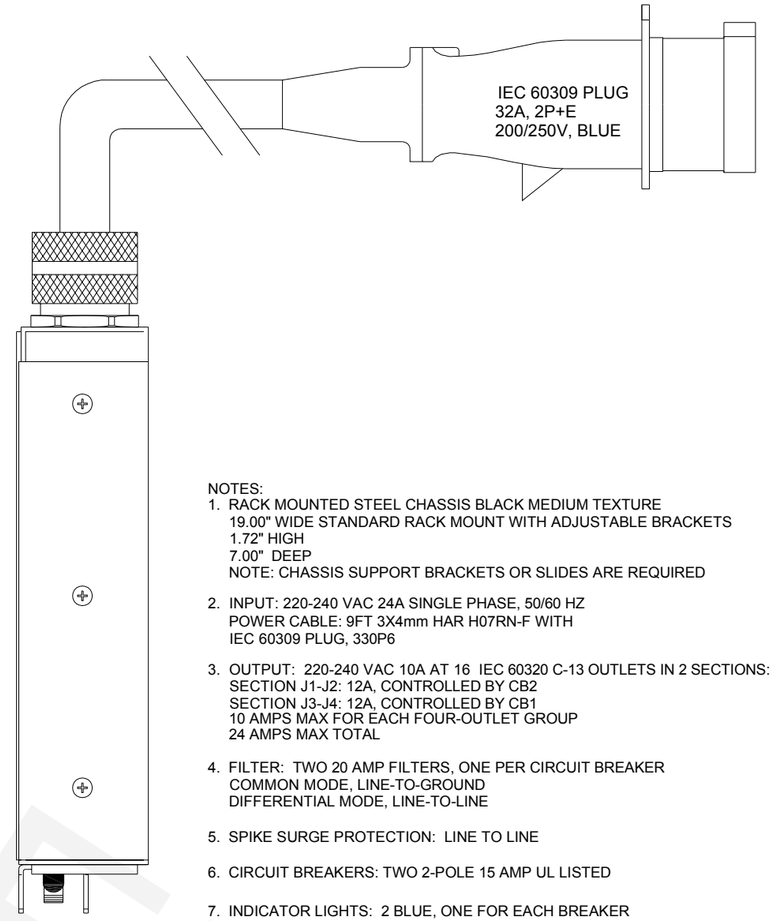

NOTES:

1. RACK MOUNTED STEEL CHASSIS BLACK MEDIUM TEXTURE
   19.00" WIDE STANDARD RACK MOUNT WITH ADJUSTABLE BRACKETS
   1.72" HIGH
   7.00" DEEP
   NOTE: CHASSIS SUPPORT BRACKETS OR SLIDES ARE REQUIRED
2. INPUT: 220-240 VAC 24A SINGLE PHASE, 50/60 HZ
   POWER CABLE: 9FT 3X4mm HAR H07RN-F WITH
   IEC 60309 PLUG, 330P6
3. OUTPUT: 220-240 VAC 10A AT 16 IEC 60320 C-13 OUTLETS IN 2 SECTIONS:
   SECTION J1-J2: 12A, CONTROLLED BY CB2
   SECTION J3-J4: 12A, CONTROLLED BY CB1
   10 AMPS MAX FOR EACH FOUR-OUTLET GROUP
   24 AMPS MAX TOTAL
4. FILTER: TWO 20 AMP FILTERS, ONE PER CIRCUIT BREAKER
   COMMON MODE, LINE-TO-GROUND
   DIFFERENTIAL MODE, LINE-TO-LINE
5. SPIKE SURGE PROTECTION: LINE TO LINE
6. CIRCUIT BREAKERS: TWO 2-POLE 15 AMP UL LISTED
7. INDICATOR LIGHTS: 2 BLUE, ONE FOR EACH BREAKER
8. UL/cUL LISTED PRODUCT
9. RoHS COMPLIANT PRODUCT PER
   DIRECTIVE 2002/95/EC WITH APPLICABLE EXEMPTIONS.

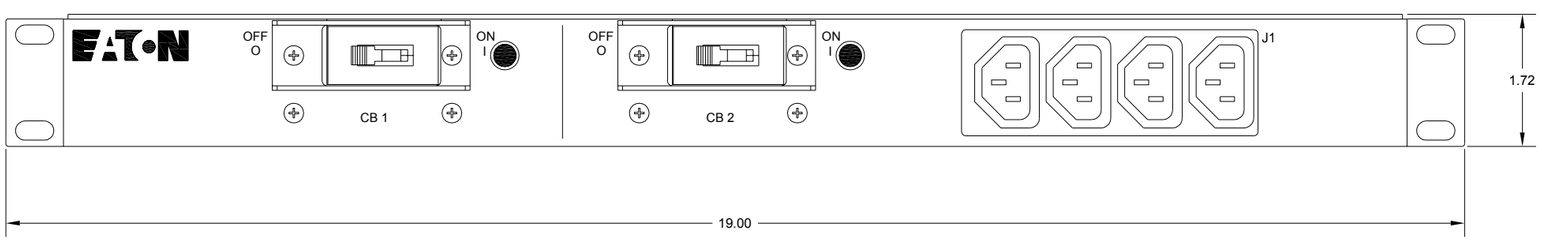

ALEXANDER SCNEIDER APPROVAL DATE

RELEASED

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF EATON CORPORATION. EATON CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THERETO, AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT 2010 EATON CORP

EATON
9650 Jeronimo Road, Irvine, California 92618
Phone (949) 452-9500 www.ePDU.com

DIMENSIONS IN INCHES
TOLERANCES:
DECIMALS ANGLES
.XX ± 0.5°
±.020
.XXX UNLESS OTHERWISE SPECIFIED
±.010
CAGE CODE 31795

TITLE ENGINEERING DRAWING
TPC2105-1-108 ASSY 2790

DRAWN BY: J. OSBORNE
DWG FILENAME: TPC_2105_1_108_2790_ME

SCALE	SIZE	SHEET	DWG NO.	REV
1:1	D	1 OF 1	TPC-2105-1-108-2790-ME	D